

# HIGH PERFORMANCE DRY LUBE PTFE




**SPECIALIST™**

WD-40 Specialist High Performance Dry Lube PTFE contains PTFE (polytetrafluoroethylene) which delivers enhanced lubrication and protection, leaving a dry clear film that won't attract dirt, dust and oil. WD-40 Specialist High Performance Dry Lube PTFE is also quick drying and great as a mould release agent.

## FEATURES AND BENEFITS

- ⊕ Withstands temperatures of -45°C to +260°C
- ⊕ Long lasting lubrication
- ⊕ Dry film that resist dirt, dust and oil
- ⊕ Extend the life of tools and equipment
- ⊕ For use on metals, glass, vinyl, rubber and most plastics

## APPLICATIONS

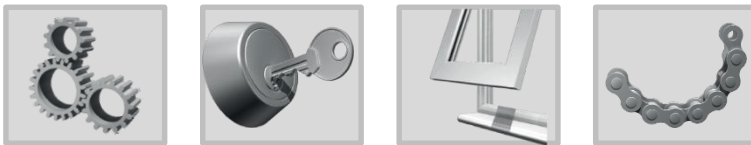

Gears • Locks • Tracks • Chains • Blades • Drill Bits • Power Tools and Equipment • Hinges

## DIRECTIONS

Shake can well before use. Apply by spraying directly on surface to be lubricated and protected. Dries in seconds.

## PHYSICAL AND CHEMICAL PROPERTIES WITHOUT PROPELLANT

Boiling Point (initial)	98°C
Solubility in Water	Insoluble
4 Ball Wear	1.0mm (ASTM D4172)
Extreme pressure	4500 lbs (ASTM D3233)
Flash Point	-4°C (ASTM D3828)
Appearance/Odor	Colorless liquid with a petroleum odor

## PACKAGING

PRODUCT NAME	UNIT CODE	UNIT SIZE	CASE SIZE
HIGH PERFORMANCE WHITE LITHIUM GREASE	35004	360ML	12

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **WD-40 Company specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of WD-40 Company products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.**



H2 REGISTERED  
#148323